
CKL/FV

Programmable coaxial light

Coaxial optics combine with time-sequenced stripe lighting for reflective surfaces. Compare texture, specular reflection and surface shape across lighting states.

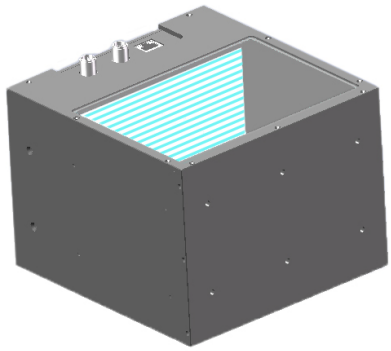

Available models


Model	Input voltage	Power
LXV-CKL/FV180-W	24 V	35 W
LXV-CKL/FV350-W	24 V	75 W
LXV-CKL/FV520-W	24 V	105 W

Technical specifications


Parameter	Value
Input voltage	DC 24 V
Communication	Ethernet
External trigger voltage	DC 5–24 V

CKL/FV / Application & construction

Illumination geometry

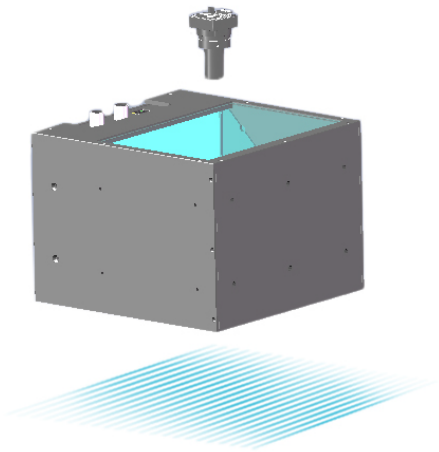

Application imaging examples

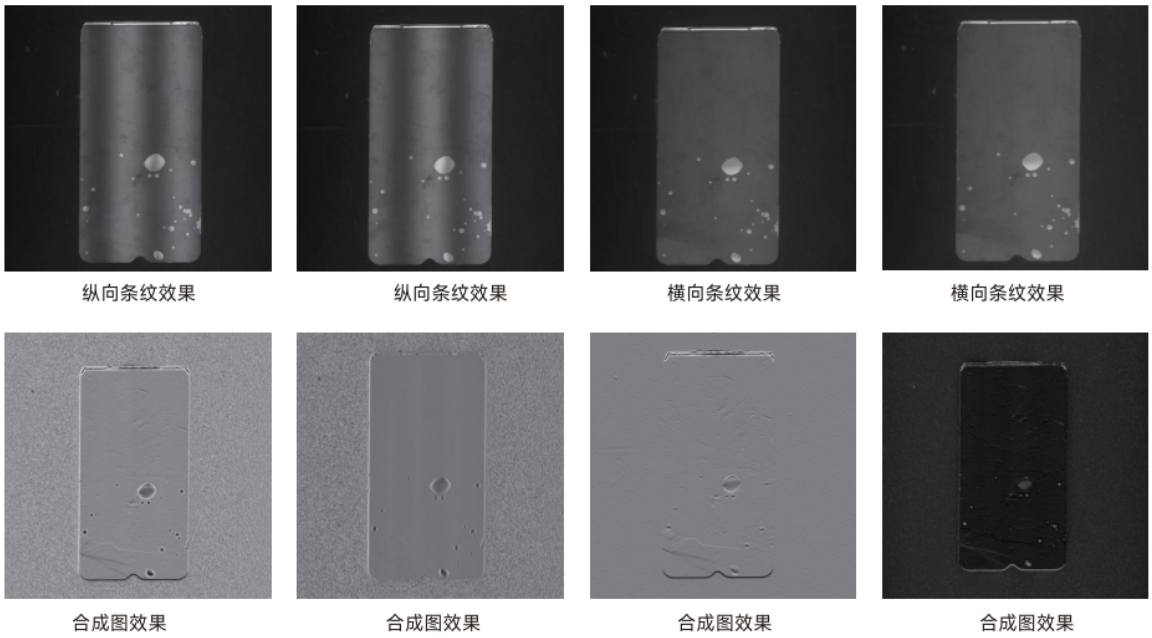

Illustrations retain their original technical annotations. Imaging examples are for application evaluation; the final result depends on the workpiece, optics, exposure and lighting configuration.